


# ROOSEVELT II - Specifications

Construction	Recommended Usage	Thickness	Wear Layer	Wear Layer Treatment	Finish	Width	Standard Length	Average Weight of Standard Roll	Warranty
Sheet Vinyl	Residential	90 Gauge	8 mil	QuickClean	Mechanically Embossed	13' 2" / 12' Limited SKUs	100 lineal ft / 100 lineal ft	396 lbs / 361 lbs	3-Year Residential*

\* See written limited warranty for full details.

## Multi-Layer Construction Built to perform

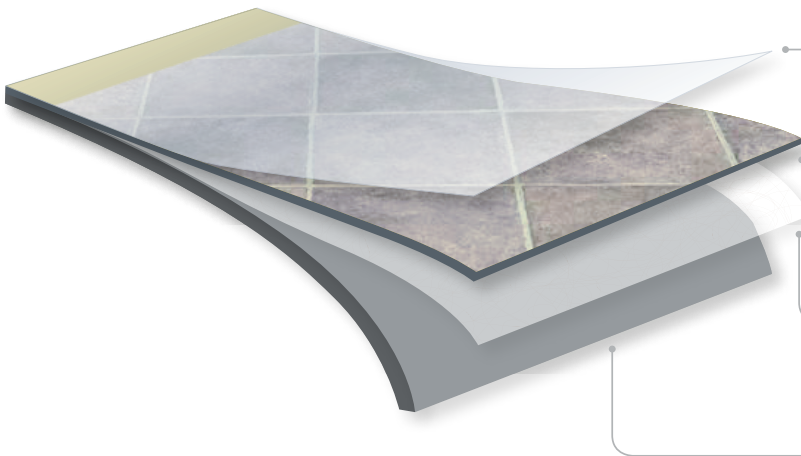

### QuickClean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

### Design Layer

Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market.

### Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding or contracting.

### Comfort Foam Backing

Comfort Foam is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

# Testing Information

Residual Indentation   ASTM F1914.....	0.010
Flexibility   ASTM F137.....	Passes (10 mm)
Resistance to Heat   ASTM F1514.....	Passes
Resistance to Light   ASTM F1515.....	Passes
Resistance to Chemicals   ASTM F925.....	Passes
IIC Sound Transmission.....	IIC 54



Made in the USA

